



Type MP 223

2-way proportional valve
direct actuated, NC
(normally closed)



Application
Neutral liquids, gases
and vapors



Type/ Order No.	Orifice [mm]	Port size	Pressure range [bar]		kv-value [m³/h]	Weight [kg]
			AC	DC		
MP 223-001	1,0	G1/8	0 - 10	0,03	0,4	
MP 223-002	2,0	G1/8	0 - 6	0,11	0,4	
MP 223-003	3,0	G1/8	0 - 3	0,22	0,4	
MP 223-004	4,0	G1/8	0 - 1	0,39	0,4	

Sealing material: **P** (NBR) **E** (EPDM) **V** (FPM)


Body material: Brass
 Inner parts: Stainless steel (1.4105)
 Mounting direction: Free, preferred upwards
 Max. ambient temp.: 50 °C
 Viscosity of the medium: max. 21 mm²/s (3 °E)
 Static pressure: max. 10 bar
 Voltage range: DC: 0 - 24 V, 0 - 12 V

Power consumption: max. 11 W
 Current drain: 24 V: max. 460 mA
 12 V: max. 920 mA
 Duty cycle: 100 %
 Degree of Protection: IP 54 (EN 60529)

320

Other configurations upon request

staiger

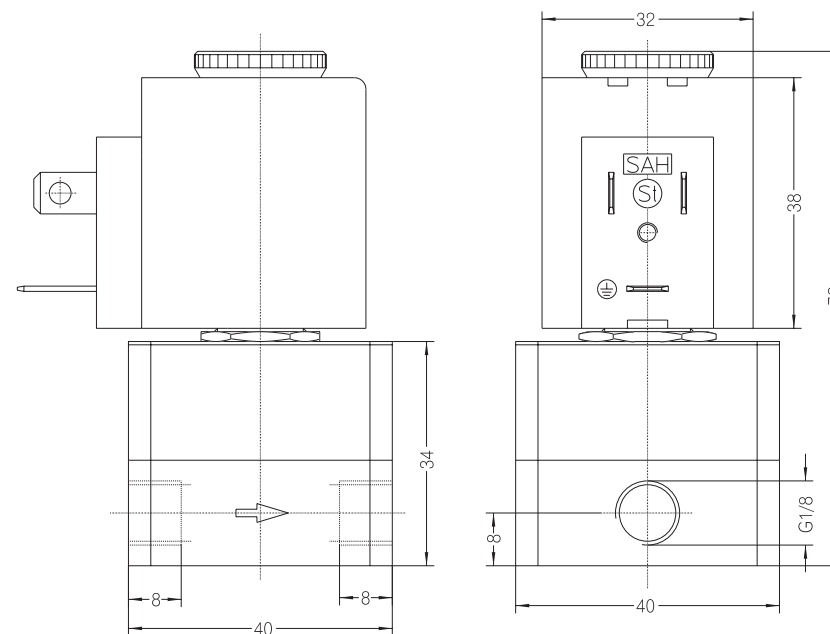

The right to modification is reserved

321

Dimensions in mm