


### Type MR 000

3-way and 4-way manifold valves, pilot operated, with parallel control unit

**Application**  
compressed air  
and neutral gases



Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m³/h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
MR 000-001	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	6 - 1	with
MR 000-002	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	6 - 1	without

Sealing material: **P** (NBR)

Inner parts: Stainless steel  
Max. ambient temp.: 50 °C  
Operating voltage: DC: 24 V, 12 V  
Voltage tolerance: -15%... +10%


Body material: Aluminum (anodized)  
Mounting direction: free  
Power consumption: 1 W each valve  
Duty cycle: 100 %  
Degree of Protection (EN 60529): IP 54 (IP 64)  
Electrical connection: see page 430

404

Other configurations upon request

The right to modification is reserved

staiger

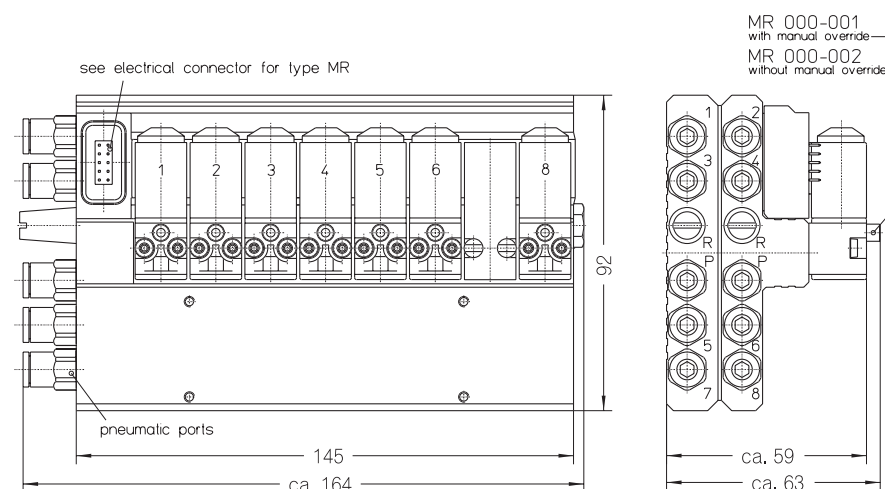

Mounting types and accessories see page 432





Dimensions in mm

405

### Type MR 000

3-way and 4-way manifold valves, pilot operated, with parallel control unit

**Application**  
compressed air  
and neutral gases

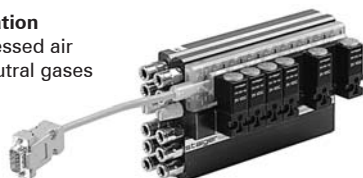

Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m³/h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
MR 000-003	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	4 - 2	with
MR 000-004	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	4 - 2	without

Sealing material: **P** (NBR)


Inner parts: Stainless steel  
Max. ambient temp.: 50 °C  
Operating voltage: DC: 24 V, 12 V  
Voltage tolerance: -15%... +10%

Body material: Aluminum (anodized)  
Mounting direction: free  
Power consumption: 1 W each valve  
Duty cycle: 100 %  
Degree of Protection (EN 60529): IP 54 (IP 64)  
Electrical connection: see page 430

406

Other configurations upon request

The right to modification is reserved

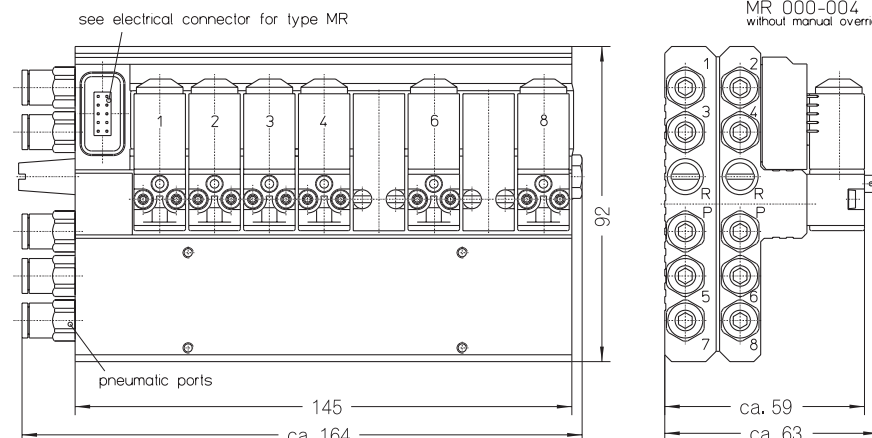

Mounting types and accessories see page 432




Dimensions in mm

407

### Type MR 000

3-way and 4-way manifold valves, pilot operated, with parallel control unit

**Application**  
compressed air  
and neutral gases



Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m <sup>3</sup> /h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
MR 000-005	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	2 - 3	with
MR 000-006	4,0	Tube O.D. 6	1,5 - 8,0	0,39	1,5	2 - 3	without

Sealing material: **P** (NBR)


Inner parts: Stainless steel  
Max. ambient temp.: 50 °C  
Operating voltage: DC: 24 V, 12 V  
Voltage tolerance: -15%... +10%

Body material: Aluminum (anodized)  
Mounting direction: free  
Power consumption: 1 W each valve  
Duty cycle: 100 %  
Degree of Protection (EN 60529): IP 54 (IP 64)  
Electrical connection: see page 430

408

Other configurations upon request

stalger

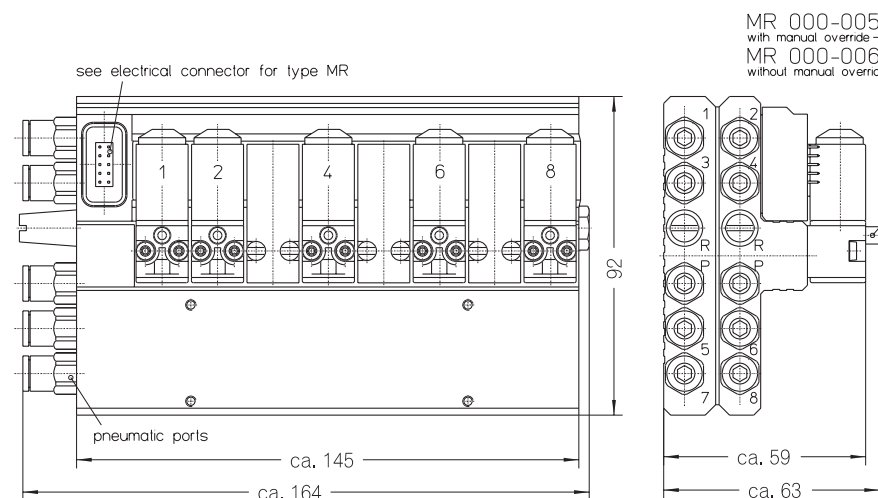

The right to modification is reserved

Mounting types and accessories see page 432



Dimensions in mm

409