


### Type SR 000

3-way and 4-way manifold valves, pilot operated, with programmable control unit

**Application**  
compressed air  
and neutral gases



Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m³/h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
SR 000-001	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	6 - 1	with
SR 000-002	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	6 - 1	without

Sealing material: **P** (NBR)


Inner parts: Stainless steel  
Max. ambient temp.: 50 °C  
Operating voltage: DC: 24 V, 12 V  
Voltage tolerance: -15%... +10%

Body material: Aluminum (anodized)  
Mounting direction: free  
Power consumption: 1 W each valve  
Duty cycle: 100 %  
Degree of Protection (EN 60529): IP 54 (IP 64)

424

Other configurations upon request

staiger

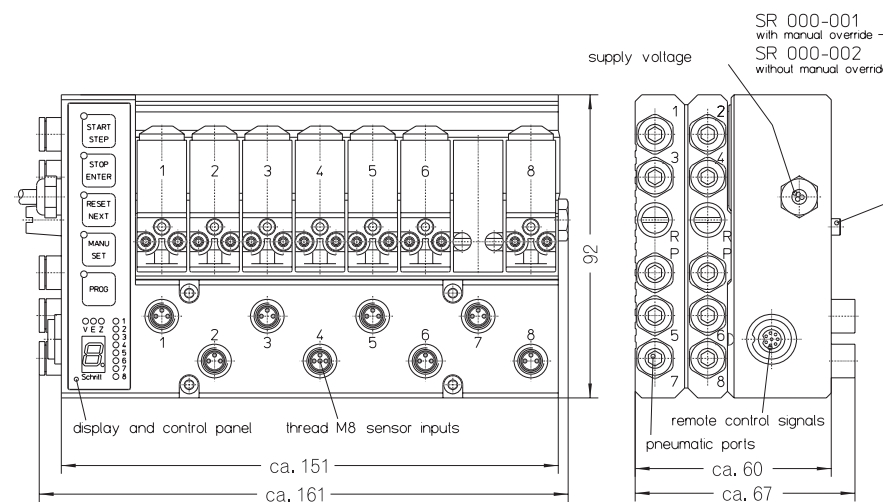

The right to modification is reserved

Mounting types and accessories see page 432




Dimensions in mm

425

### Type SR 000

3-way and 4-way manifold valves, pilot operated, with programmable control unit

**Application**  
compressed air  
and neutral gases



Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m³/h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
SR 000-003	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	4 - 2	with
SR 000-004	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	4 - 2	without

Sealing material: **P** (NBR)


Inner parts: Stainless steel  
 Max. ambient temp.: 50 °C  
 Operating voltage: DC: 24 V, 12 V  
 Voltage tolerance: -15%... +10%

Body material: Aluminum (anodized)  
 Mounting direction: free  
 Power consumption: 1 W each valve  
 Duty cycle: 100 %  
 Degree of Protection (EN 60529): IP 54 (IP 64)

426

Other configurations upon request

staiger

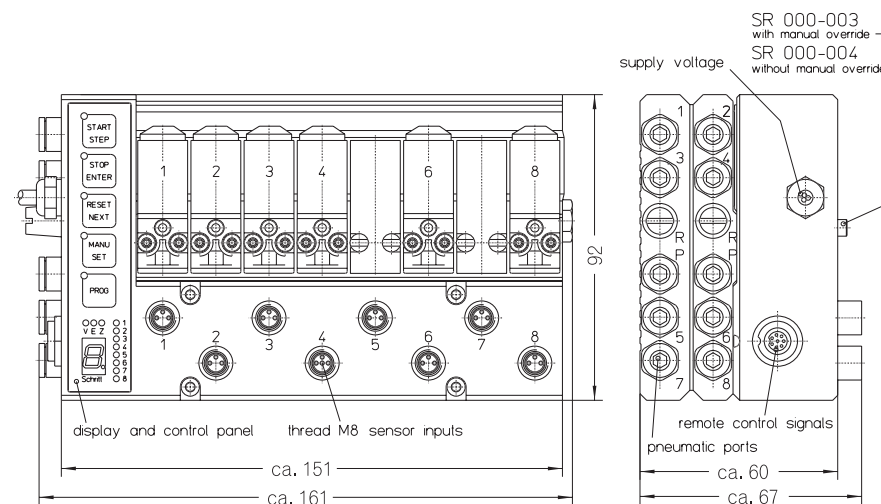

The right to modification is reserved

Mounting types and accessories see page 432


427

Dimensions in mm

### Type SR 000

3-way and 4-way manifold valves, pilot operated, with programmable control unit

**Application**  
compressed air  
and neutral gases



Type/ Order No.	Orifice [mm]	Port size	Pressure [bar]	kv-value [m <sup>3</sup> /h]	Weight [kg]	No. of 3 - 4 way valves	Manual override
SR 000-005	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	2 - 3	with
SR 000-006	4,0	Tube O.D. 6	1,5 - 8,0	0,39	2,1	2 - 3	without

Sealing material: **P** (NBR)


Inner parts: Stainless steel  
Max. ambient temp.: 50 °C  
Operating voltage: DC: 24 V, 12 V  
Voltage tolerance: -15%... +10%

Body material: Aluminum (anodized)  
Mounting direction: free  
Power consumption: 1 W each valve  
Duty cycle: 100 %  
Degree of Protection (EN 60529): IP 54 (IP 64)

428

Other configurations upon request

staiger

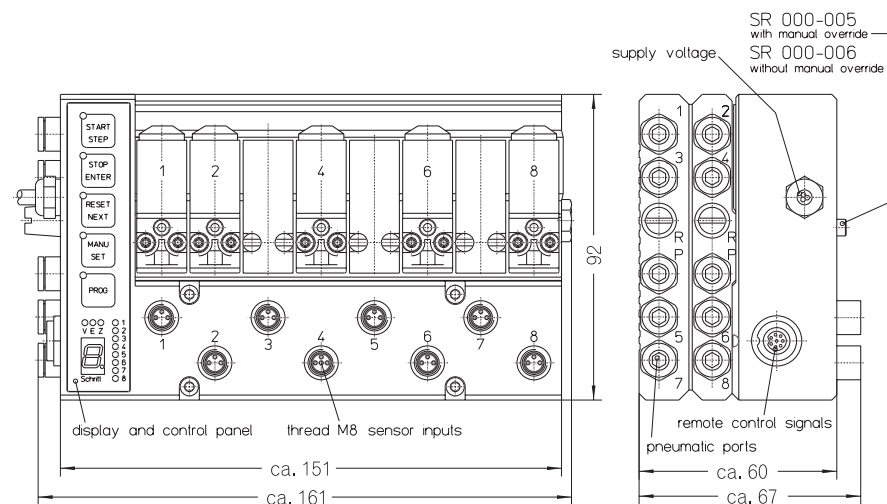

The right to modification is reserved

Mounting types and accessories see page 432



Dimensions in mm

429