


Type ZL

Power reduction



Application
Large power solenoid valves with pin connectors standard to DIN 43650



Function	Voltage	Energizing power Pa	Energizing time t_A	Stand by power	Frequency of stand by voltage
001	12 VDC	max. 25 W	0,5... 0,7 s	ca. 25% Pa	140... 220 Hz
001	24 VDC	max. 25 W	0,5... 0,7 s	ca. 25% Pa	140... 220 Hz
002	115 VAC/60 Hz	max. 40 VA	1,3... 1,6 s	ca. 25% Pa	-
002	230 VAC/50-60 Hz	max. 40 VA	1,3... 1,6 s	ca. 25% Pa	-

Connector

SAW DIN 43650 - A

SAD DIN 43650 - B

SAH DIN 43650 - BI


Housing material: Polyamid black
Ambient temp. range: 0... +80 °C
Degree of protection (EN 60529): IP 65 (installed)

Order code see page 369





366

Other configurations upon request



staiger

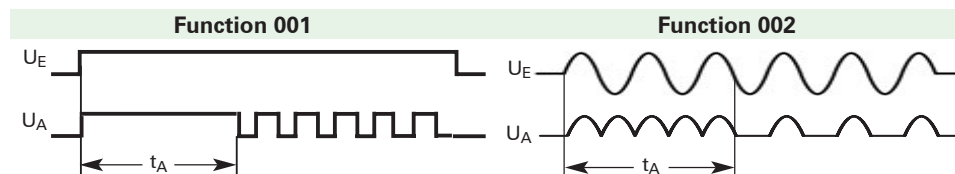

SAW SAH SAD

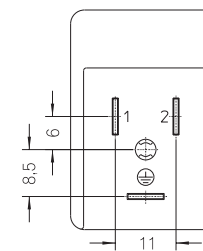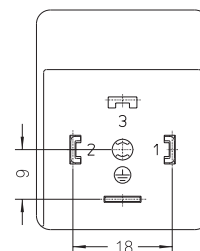

367

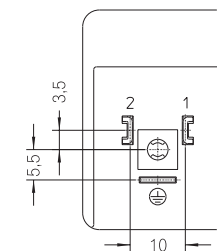

Dimensions in mm

The right to modification is reserved